



YUHCHANG

Capacitors for UV Curing Equipments

Capacitor was designed with multiple sections specifically to the demand of capacity regulating for UV curing equipments. Their performances can endurance the transient, switching, and varied currents. Use excellent film as dielectric, and impregnate biodegradable and no toxicity insulation oils. High quality, capacitance stable and low temperature rise are the best selection for UV curing equipments.

Performances:

Standards: IEC 60871, CNS 1372 & 3739

Ambient temperature: -25 +45

Tolerance of capacitance: -5% +10%

Dissipation factor: < 0.1%

Insulation resistance(Terminals to Case): > 1000 MΩ

Max. permissible voltage: 110% of rated voltage

Max. permissible current: 130% of rated current

Test voltage between terminals: Rated voltage × 2 VAC for 1 minute

Test voltage between terminals and case: Rated voltage × 2+1000 VAC for 1 minute

External discharging resisters: Residual voltage drops to lower than 50V within 5 minutes
after capacitor is disconnected from power.

Optional parts: Insulation tubes for each terminals

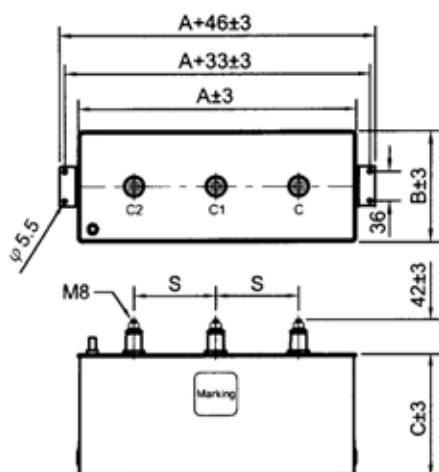


Fig. 1

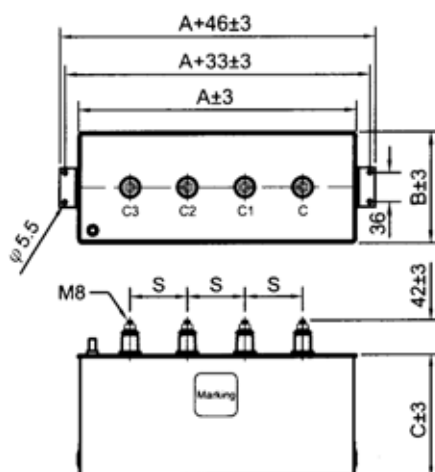


Fig. 2

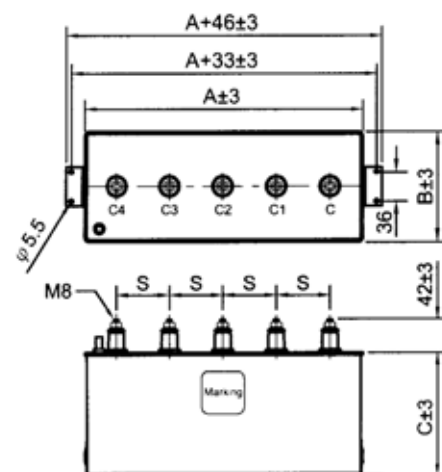


Fig. 3

An ISO 9001 Company



裕昌機電工廠股份有限公司

YUHCHANG ELECTRIC CO., LTD.

Address: No. 59, Chung Cheng Street, Ching Shui District, Taichung City, Taiwan

TEL:+886-4-2622-4188 FAX:+886-4-2622-4646

Web address: <http://www.capacitor.com.tw>

E-mail: yce919@ms1.hinet.net

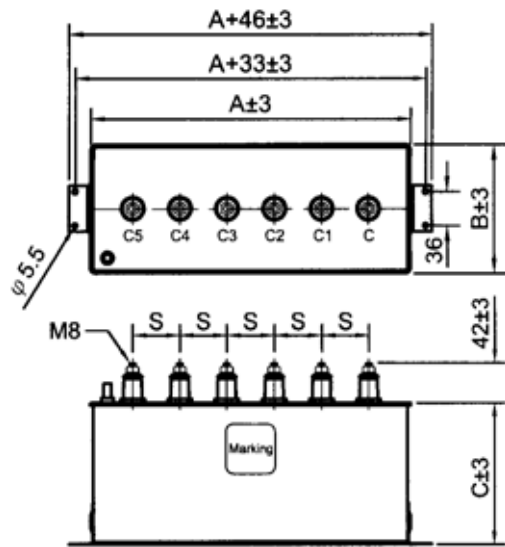


Fig. 4

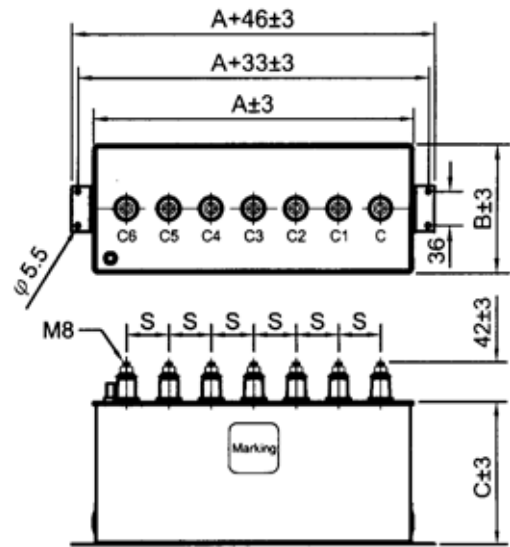


Fig. 5

Rated Voltage (VAC)	Capacitance (uF)						Dimension (mm)				Figures
	C1	C2	C3	C4	C5	C6	A	B	C	S	
700	5.4	5.4					120	65	200	35	1
700	54	10.8					340	135	150	100	1
700	9	9	9				230	95	160	50	2
700	29	6	2				230	95	180	50	2
700	43.2	10.8	5.4	5.4			340	135	150	65	3
700	27	5.4	9	9	9	5.4	340	135	150	45	5
1000	20	8					230	95	160	50	1
1000	50	50					340	135	220	100	1
1000	18.5	4.5	5				230	95	160	50	2
1000	19.3	9.6	9.6				230	95	180	50	2
1000	15	4	3	2			230	95	160	40	3
1000	28.8	5.5	4.2	7.7			340	135	150	65	3
1000	12	6	3	3	2		230	95	160	35	4
1000	21.5	10	8	7.5	5.5		340	135	150	50	4
1000	17.5	4.5	6.5	3	1.5		340	135	130	50	4
1400	8.5	1.7					115	95	200	35	1
1400	17	6					340	135	150	100	1
1400	8	1.5	1.5				230	95	130	50	2
1400	20	5	2				340	135	150	70	2
1400	8	1.5	1	0.5			230	95	130	40	3
1400	24	5.5	5.5	7			340	135	200	65	3
1400	10.5	4	4	4	4.5		340	135	150	50	4
1500	17.5	7.5					340	135	150	100	1
1500	9	1.5	1.5				340	135	150	70	2
1500	20	7	10				340	135	240	70	2
1500	27	16	16	9			340	135	280	65	3
1500	16	5	9	8	5		340	135	260	50	4
1500	20	4	5	5	5	4	340	135	260	45	5
1800	6	2					340	135	150	100	1
1800	26	5.2					340	135	200	100	1
1800	6	2	1				340	135	150	70	2
1800	17.5	3.5	4.2				340	135	180	70	2

Rated Voltage (VAC)	Capacitance (uF)						Dimension (mm)				Figures
	C1	C2	C3	C4	C5	C6	A	B	C	S	
1800	5	2	1.5	1			340	135	180	65	3
1800	17	5.5	6	5.5			340	135	220	65	3
1800	10	2	2	2	2		340	135	150	50	4
1800	12.5	5	6.5	5.5	4.5		340	135	220	50	4
1800	12.5	4.5	5	3	4.5	4	340	135	220	45	5
2000	14	6					340	135	180	100	1
2000	8	8	3.5				340	135	150	70	2
2000	14.5	2	6.5	1			340	135	200	65	3
2000	12	6	3	2	2		340	135	200	50	4
2000	10	1.5	3	4.5	2	3	340	135	200	45	5
2200	17	2.5					340	135	180	100	1
2200	13	13	2.5				340	135	220	70	2
2200	6	0.5	1.5	1.5			340	135	150	65	3
2500	8	6					340	135	180	100	1
2500	10	3	2.6				340	135	200	70	2
2500	10	5	3	1			340	135	220	65	3
2600	15	7					340	135	260	100	1
2600	17	5	5				340	135	320	70	2
2600	6.5	4.5	5.5	3.5			340	135	240	65	3
2600	11	3	4	3	2		340	135	260	50	4
2800	9	2.5					340	135	200	100	1
2800	8	4	2				340	135	240	70	2
2800	8	1	2	2			340	135	240	65	3
3000	11	7					340	135	280	100	1
3000	11	5.5	5.5				340	135	340	70	2
3000	9	5.5	5	4			340	135	350	65	3
3000	9.5	1.5	4.5	2.5	1.5		340	135	310	50	4
3600	7	3					340	135	240	100	1
3600	8	5	4.5				340	135	420	70	2
3600	8	3.5	3	1			340	135	350	65	3
3600	5	2.5	2.5	2.5	2.5		340	135	350	50	4
3600	3.5	1	1.25	0.75	1.25		340	135	220	50	4
4000	7	3					340	135	280	100	1
4000	5.7	1.4	1.4				340	135	240	70	2
4000	5.7	1.4	1.4	1.7			340	135	280	65	3
4000	5	0.5	2.5	1.5	0.5		340	135	280	50	4
4000	5.5	2.5	2	1	2	1	340	135	360	45	5
4500	5.2	1.4					340	135	220	100	1
4500	6	2.1	2				340	135	330	70	2
4500	7.5	2.3	1	2			340	135	390	65	3
4500	6.3	2.5	2.5	1.2	2.5		340	135	450	50	4
5000	6	2.4	1.8				340	135	450	70	2
5000	5	3	2	1			340	135	450	65	3
5000	4	2	2	1.5	1		340	135	450	50	4

Note: Other specification available on request.