

Applications:

DC linking or DC filtering in industry and traction converts, low power drives. Impulse discharge capacitors for magnetizing and welding. Replace of aluminum electrolytic capacitors for lower capacitance and higher currents.

Features:

- ◆ High impulse discharge current capability
- ◆ Very low stray inductance (ESL)
- ◆ Epoxy resin filling
- ◆ Non-polar dielectric
- ◆ Resistance to heavy duty shock and vibration
- ◆ Long life expectancy and high reliability



Specification and Performance:

Standards	IEC 61071, IEC 61881-1
Installation	Indoor use, maximum above sea level 1000M
Capacitance tolerance	-5%/+10% (optional for ±5% or ±10%)
Operating temperature of case	-40°C to +80°C
Dielectric	Metallized polypropylene film with self-healing technology
Dissipation factor	< 0.1%
Test voltage between terminals	Unx1.5 VDC, 10s
Test voltage between terminals and case	Unx2 VDC+1000 VAC, 10s
Equivalent series inductance (ESL)	< 100 nH
Filling	Epoxy resin, UL94 V-0
Case material	Aluminum
Terminals	M6, M8, or M10 terminals of tinned brass, maximum torque 3, 5, 7Nm, respectively.
Mounting method	M12 stud with washer and nut on bottom of aluminum can. Maximum torque 12 Nm
Cooling method	Naturally air-cooled or force air cooling

ISO 9001 Company



裕昌機電工廠股份有限公司
YUHCHANG ELECTRIC CO., LTD.

總公司: 台灣・台中市清水區中正街59號
台北連絡處: 台北市復興南路1段321號二樓
高雄連絡處: 高雄市復興一路5之1號

Address: 59, CHUNG-CHENG STREET, CHING-SHUI DISTRICT, TAICHUNG CITY 43653, TAIWAN
Tel: +886-4-26224188 Fax: +886-4-26224646
http://www.capacitor.com.tw E-mail: yce919@ms1.hinet.net

TEL:04-26224188


FAX:04-26224646

TEL:02-27021616

FAX:02-27066162

TEL:07-2417766

FAX:07-2915282

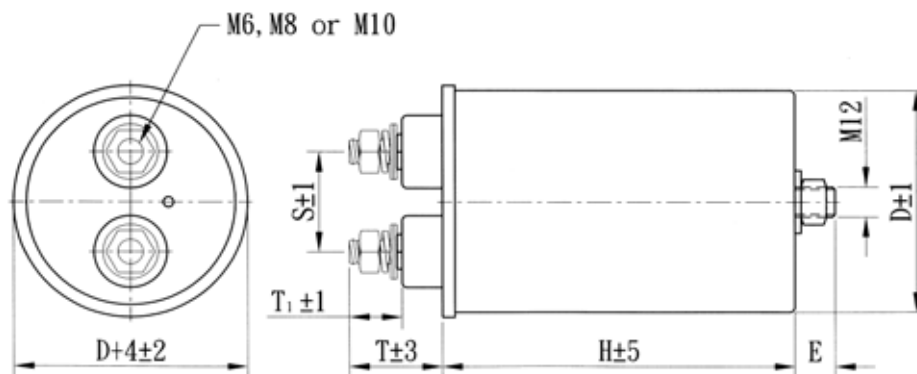

$U_{NDC} = 880V_{DC}$

Type	Voltage V_{DC}	μF	R_s (m Ω)	R_{th} (k/W)	$I_{max.}$ (A)	I_p (kA)	I (kA)	D	H	S	T	T_1	E	Terminal	Weight (kg)
PE3-8-U2006	880	200	2.7	10.2	30.0	0.70	2.10	66	120	24	29	13.6	12	M6	0.4
PE3-8-U5106	880	510	1.6	7.4	45.0	1.28	3.83	89	145	40	40	19	16	M8	0.8

$U_{NDC} = 1300V_{DC}$

Type	Voltage V_{DC}	μF	R_s (m Ω)	R_{th} (k/W)	$I_{max.}$ (A)	I_p (kA)	I (kA)	D	H	S	T	T_1	E	Terminal	Weight (kg)
PE3-13-U9005	1300	90	5.9	4.7	30.0	0.45	1.35	66	120	24	29	13.6	12	M6	0.3
PE3-13-U1956	1300	195	4.1	6.5	30.0	0.49	1.46	66	200	24	29	13.6	12	M6	0.7
PE3-13-U7106	1300	710	1.5	4.0	60.0	3.55	10.7	116	200	40	37	21	16	M10	1.9

$U_{NDC} = 1750V_{DC}$

Type	Voltage V_{DC}	μF	R_s (m Ω)	R_{th} (k/W)	$I_{max.}$ (A)	I_p (kA)	I (kA)	D	H	S	T	T_1	E	Terminal	Weight (kg)
PE3-17-U5005	1750	50	10.6	3.7	25.0	0.35	1.05	66	120	24	29	13.6	12	M6	0.3
PE3-17-U1106	1750	110	7.2	5.3	25.0	0.33	0.99	66	200	24	29	13.6	12	M6	0.5
PE3-17-U3906	1750	390	2.7	3.2	50.0	13.7	4.10	116	200	40	37	21	16	M10	2.1

$U_{NDC} = 2200V_{DC}$

Type	Voltage V_{DC}	μF	R_s (m Ω)	R_{th} (k/W)	$I_{max.}$ (A)	I_p (kA)	I (kA)	D	H	S	T	T_1	E	Terminal	Weight (kg)
PE3-22-U3005	2200	30	17.7	2.2	25.0	0.27	0.81	66	120	24	29	13.6	12	M6	0.3
PE3-22-U7005	2200	70	11.4	3.4	25.0	0.28	0.84	66	200	24	29	13.6	12	M6	0.5
PE3-22-U2506	2200	250	4.2	2.6	45.0	1.00	3.00	116	200	40	37	21	16	M10	2.1

* Other voltage, current, and capacitance values are available on request.