




Performance:

Reference Standards	IEC 61071; IEC 60871
Installation	Indoor use, maximum above sea level 1000M
Capacitance tolerance	-5%/+10% (Optional for $\pm 5\%$ or $\pm 10\%$)
Operating temperature of case	-25°C to +60°C
Dielectric	Polypropylene film
Dissipation factor	< 0.1%
Test voltage between terminals	Unx1.25 V, 10s
Cooling method	Naturally air-cooled

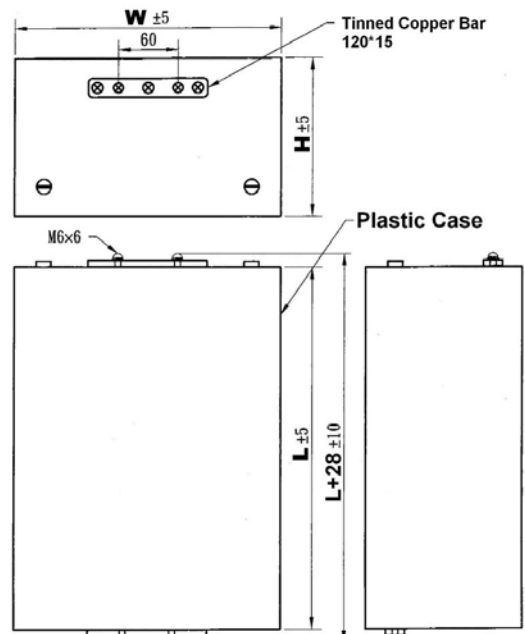

Specifications:

電壓 kVDC	容量 uF	能量 Energy kJ	Reverse Voltage %	Peak Current kA	等效感值 ESL nH	預期壽命 Design Life	外型尺寸 L*W*H (mm)	概重(kg) Approx. Weight	料號 PART NUMBER
50	1	1.25	80	100	< 35	1x10 ⁴	395*270*160	18.6	800102D00050300
100	0.04	0.2	80	100	< 50	1x10 ⁴	185*152*80	3.4	8004B2D00010400

Other design are available.

ISO 9001 Company



裕昌機電工廠股份有限公司
YUHCHANG ELECTRIC CO., LTD.

總公司: 台灣·台中市清水區中正街59號
台北連絡處: 台北市復興南路1段321號二樓
高雄連絡處: 高雄市復興一路5之1號

Address: 59, CHUNG-CHENG STREET, CHING-SHUI DISTRICT, TAICHUNG CITY 43653, TAIWAN
Tel: +886-4-26224188 Fax: +886-4-26224646
http://www.capacitor.com.tw E-mail: yce919@ms1.hinet.net